



## Panels

### Panel Standard Insert High Temperature

Connector for thermocouple and RTD circuits. Solid pin design ensures good contact even in demanding applications. Hollow pin design offers a good quality product at competitive pricing for less frequently used connectors.

#### **Construction :**

Thermosetting body with original thermocouple material pins and springloaded inserts.

Polarized pins.

Molded barriers prevent short circuit.


Polarity indication next to connection screws.

#### **Wire size :**

Accepts wires up to 1,6 mm.

#### **Temperature rating :**

350°C Max.

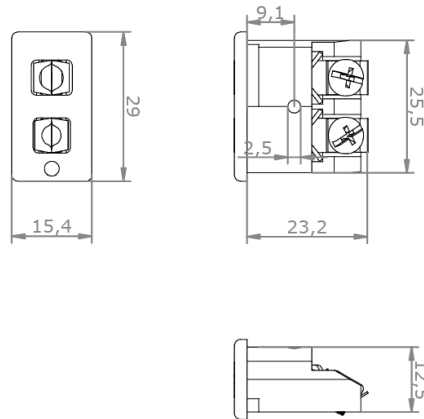

Sensor type	E	J	K	N	T	U	R/S	C	B
Material Positive	NiCr	Fe	NiCr	NiCrSi	Cu	Cu	Pt13Rh/ Pt	W5Re/ W26Re	Pt6Rh/ Pt30Rh
Material Negative	CuNi	CuNi	NiAl	NiSi	CuNi	Cu	Cu Alloy #11	CPX CNX	Cu Cu
<b>IEC Color Code</b>									
Color Body	Violet	Black	Green	Pink	Brown	White	Orange	Red	Grey
<b>ANSI Color Code</b>									
Color Body	Violet	Black	Yellow	Orange	Blue	White	Green	Red	Grey
<b>DIN Color Code</b>									
Color Body		Blue	Green		Brown		White		Grey

mit.D. S.r.l.

Web site [www.mitd.it](http://www.mitd.it) e-mail [info@mitd.it](mailto:info@mitd.it)