


RTD GS-GS D. 4.6 GRAY

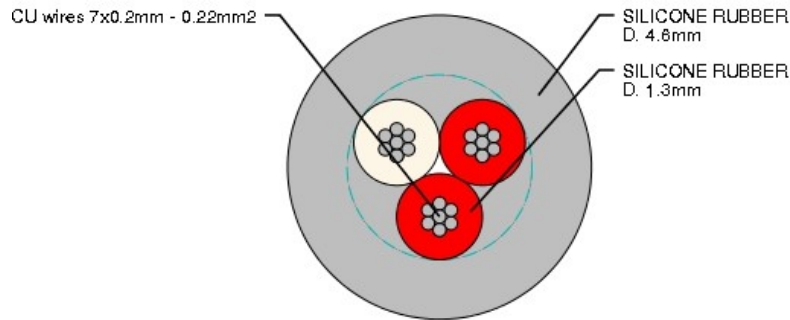

CABLE CU 3x0.22 GS-GS D. 4.6 GRAY

maximum working temperature: -55 / + 200 ° C

Conductors

number: 3
nature: copper construction: 7x0.20
cross-section: 0.22 sq. mm
electrical resistance of conductors: 89 Ohm / Km at 20 ° C

Insulation

silicone rubber
nominal diameter: 1.30mm (±0.1)
color code: 2 red 1 white

Layup

twisted conductors

Outer sheath

silicone rubber
nominal thickness: 0.90mm
color code: gray

Dimensions

nominal diameter: 4.6mm (+/- 0.2)
weight: 31.71 Kg / Km

Standard Tests

spark test 2500Vac
conductor / conductor test voltage 1000 Vdc
insulation resistance: > 20 Mohm (20 ° C)
Visual & Dimensional test conductor continuity check