





CARTRIDGE HEATER WITH  
2 EQUAL DIFFERENTIATED DEPENDENT SECTIONS  
AND TERMINAL BLOCK

**XLD2D-B**

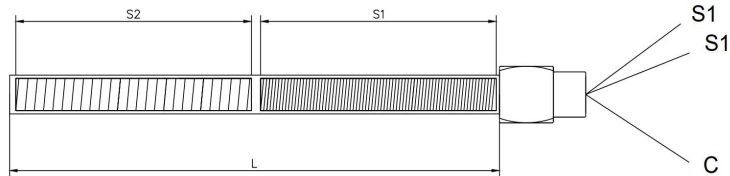

Cartridge heater model XLD2D-B, with 2 equal-sized differentiated dependent sections, equipped with a terminal block with longitudinal cable outlet. The body can be manufactured using different types of steel, depending on the application. Two phases plus common are typically routed from a single side. The cables have two different colors to distinguish the phases from the common. The phases are also numbered to identify the corresponding section. The cross-section of the common cable is sized according to the total power of the heater. All heaters are equipped with an additional silicone sheath approximately 80 mm in length to protect the cable exit from the heater. Sealing is defined based on the application and the characteristics of the heater.

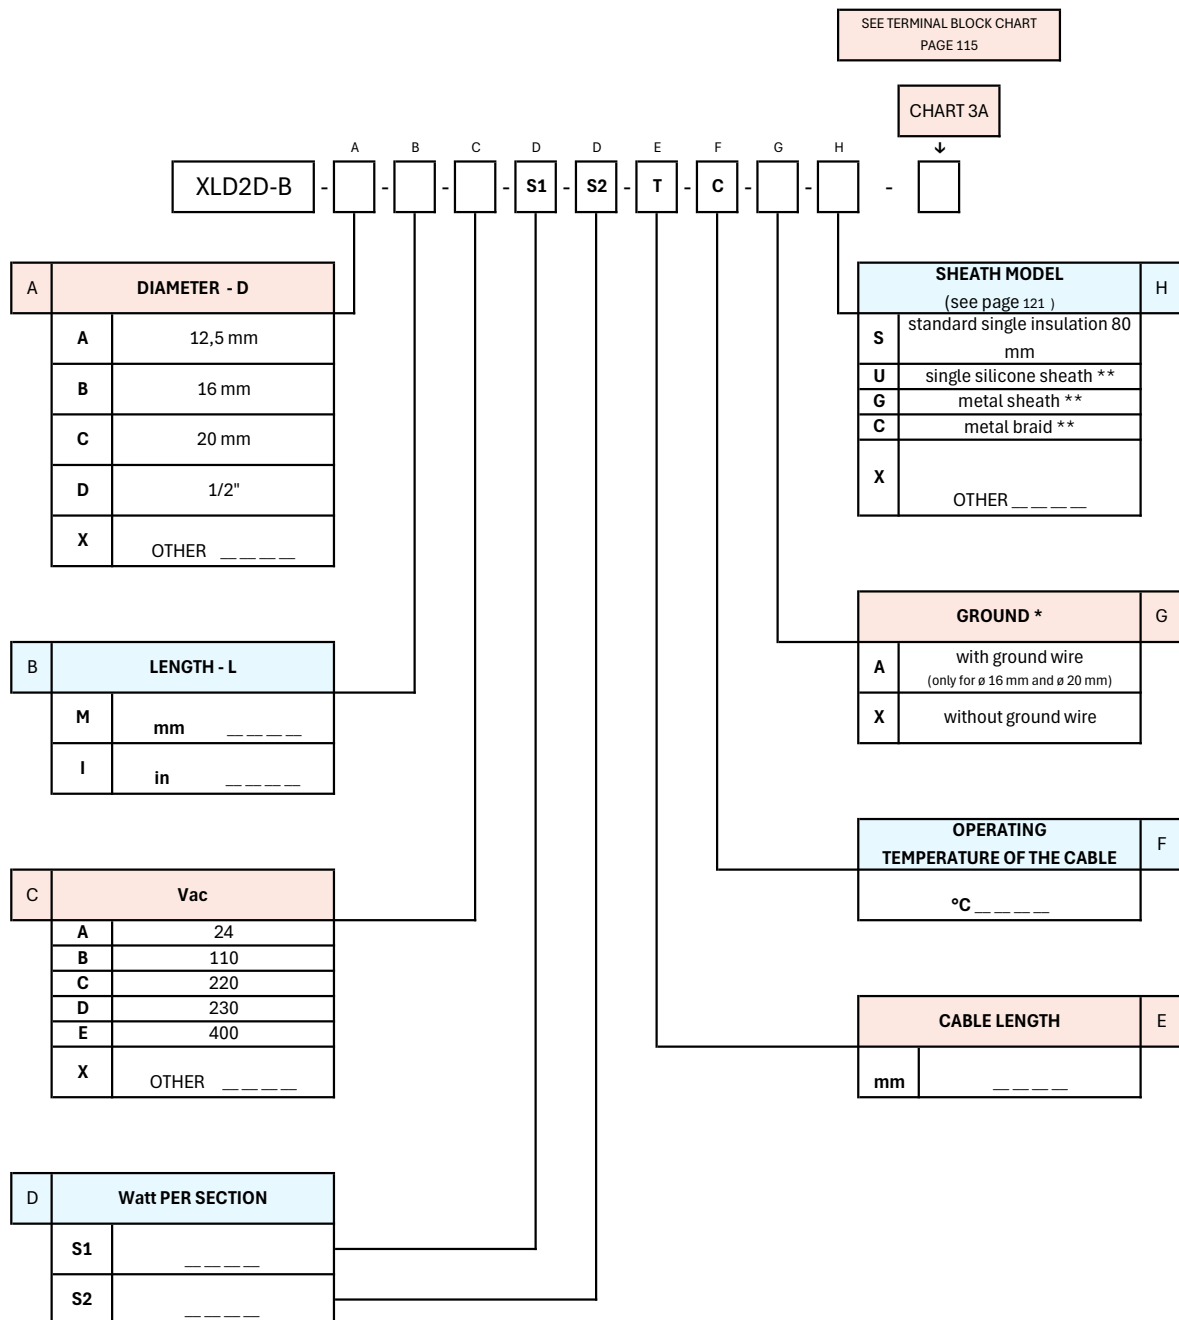

\* Of the same length as the cables

\*\* The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.