




**CARTRIDGE HEATER WITH
2 EQUAL DIFFERENTIATED DEPENDENT SECTIONS
AND FLANGE
XLD2D-F**

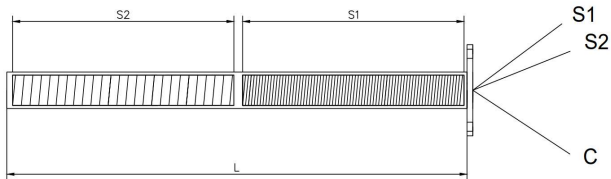

Cartridge heater model XLD2D-F, with 2 equal-sized differentiated dependent sections, equipped with a mounting flange. The body can be manufactured using different types of steel, depending on the application. Two phases plus common are typically routed from a single side. The cables have two different colors to distinguish the phases from the common. The phases are also numbered to identify the corresponding section. The cross-section of the common cable is sized according to the total power of the heater. All heaters are equipped with an additional silicone sheath approximately 80 mm in length to protect the cable exit from the heater. Sealing is defined based on the application and the characteristics of the heater.

SEE FLANGE CHART
PAGE 117
CHART 5A CHART 5B

XLD2D-F - - - - S1 - S2 - T - C - - - - - -

A	DIAMETER			
	A	12,5 mm		
	B	16 mm		
	C	20 mm		
	D	1/2"		
	X	OTHER _____		

B	LENGTH - L			
	M	mm _____		
	I	in _____		

C	Vac			
	A	24		
	B	110		
	C	220		
	D	230		
	E	400		
	X	OTHER _____		

D	Watt PER SECTION			
	S1	_____		
	S2	_____		

	SHEATH MODEL	(see page 121)		H
	S	standard single insulation 80 mm		
	U	single silicone sheath **		
	G	metal sheath **		
	C	metal braid **		
	X	OTHER _____		

	GROUND *			G
	A	with ground wire (only for ø 16 mm and ø 20 mm)		
	X	without ground wire		

	OPERATING TEMPERATURE OF THE CABLE			F
		°C _____		

	CABLE LENGTH			E
		mm _____		

* Of the same length as the cables

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.