





CARTRIDGE HEATER WITH  
2 EQUAL INDEPENDENT, DIFFERENTIATED SECTIONS  
AND TERMINAL BLOCK

**XLD2I-B**

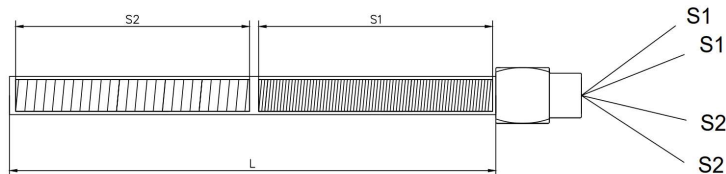

Cartridge Heater Model XLD2I-B, with 2 equal-size sections, independently controlled and differentiated, equipped with a terminal block with longitudinal cable outlet. The sheath can be made from different types of steel, depending on the application. 2 + 2 cables exit from the same side; they can either have the same color with numerical identification of the zones, or different colors for each zone. All heaters are equipped with an additional silicone sleeve, approximately 80 mm long, to protect the cable exit area. Sealing is defined according to the application and the specific characteristics of the heater.

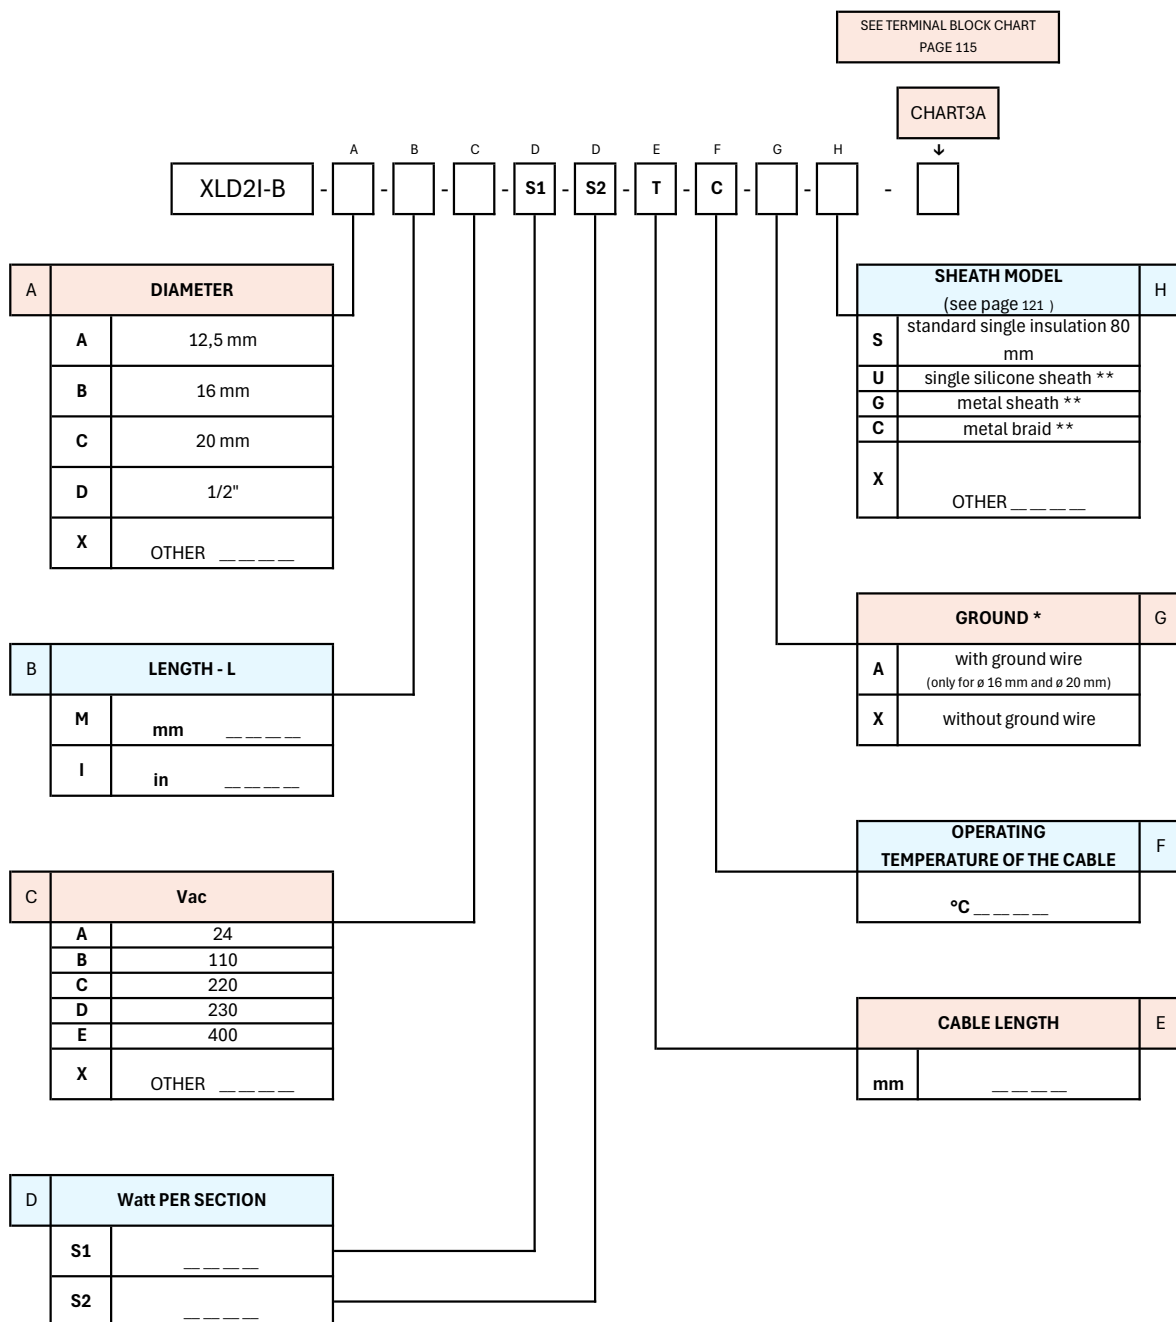

\* Of the same length as the cables

\*\* The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.