




CARTRIDGE HEATER WITH
2 EQUAL DIFFERENTIATED INDEPENDENT SECTIONS
WITH 90° TERMINAL BLOCK
XLD2I-C

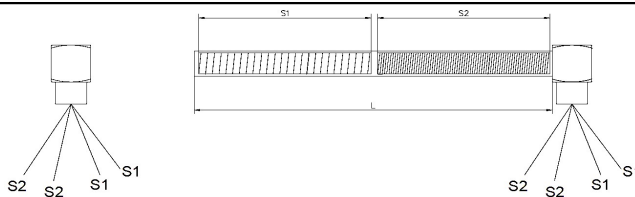

Cartridge Heater Model XLD2-C, with 2 equal-size sections, independently controlled and differentiated, equipped with a 90° cable outlet and terminal block. The body can be manufactured in various types of steel, depending on the application. 2 + 2 cables exit from the same side; they can either have the same color with numerical zone identification, or different colors for each zone. All heaters are equipped with an additional silicone sleeve, approximately 80 mm in length, to protect the cable exit area. Sealing is defined according to the application and the specific characteristics of the heater.

SEE TERMINAL BLOCK CHART
PAGE 115

CHART 3A

XLD2I-C - A - B - C - D - D - E - F - G - H -

A	DIAMETER		SHEATH MODEL (see page 121)	H
	A	12,5 mm	S	standard single insulation 80 mm
	B	16 mm	U	single silicone sheath **
	C	20 mm	G	metal sheath **
	D	1/2"	C	metal braid **
	X	OTHER _____	X	OTHER _____
B	LENGTH - L		GROUND *	G
	M	mm _____	A	with ground wire (only for ø 16 mm and ø 20 mm)
	I	in _____	X	without ground wire
C	Vac		OPERATING TEMPERATURE OF THE CABLE	F
	A	24		°C _____
	B	110		
	C	220		
	D	230		
	E	400		
	X	OTHER _____		
D	Watt PER SECTION		CABLE LENGTH	E
	S1	_____	mm	_____
	S2	_____		

* Of the same length as the cables

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.