




**CARTRIDGE HEATER WITH
2 EQUAL DIFFERENTIATED INDEPENDENT SECTIONS
AND BRACKET
XLD2I-D**

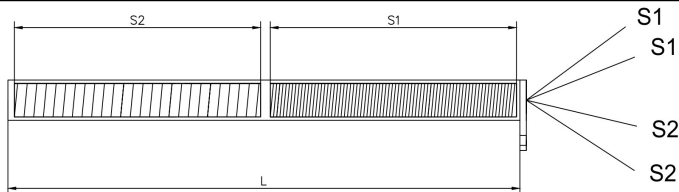

Cartridge heater model XLD2I-D, with 2 of equal-size, differentiated and independent sections, equipped with mounting bracket. Body can be made with different types of steel depending on the application. 2 + 2 cables exiting from one side, which may have the same color with numerical zone identification, or different colors between zones. All heaters are equipped with an additional silicone sheath approximately 80 mm long to protect the cable exit from the heater. Sealing is defined according to the application and heater characteristics.

SEE MOUNTING BRACKET CHART
PAG. 118
CHART 6A CHART 6B
 ↓ ↓

XLD2I-D - A - B - C - S1 - S2 - T - C - G - H - -

A	DIAMETER		
A	12,5 mm		
B	16 mm		
C	20 mm		
D	1/2"		
X	OTHER _____		

B	LENGTH - L		
M	mm _____		
I	in _____		

C	Vac		
A	24		
B	110		
C	220		
D	230		
E	400		
X	OTHER _____		

D	Watt PER SECTION		
S1	_____		
S2	_____		

	SHEATH MODEL (see page 121)		H
S	standard single insulation 80 mm		
U	single silicone sheath **		
G	metal sheath **		
C	metal braid **		
X	OTHER _____		

	GROUND *		G
A	with ground wire (only for ø 16 mm and ø 20 mm)		
X	without ground wire		

	OPERATING TEMPERATURE OF THE CABLE		F
	°C _____		

	CABLE LENGTH		E
	mm _____		

* Of the same length as the cables

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.