





**CARTRIDGE HEATER WITH  
2 EQUAL DIFFERENTIATED INDEPENDENT SECTIONS  
AND NIPPLE  
XLD2I-N**

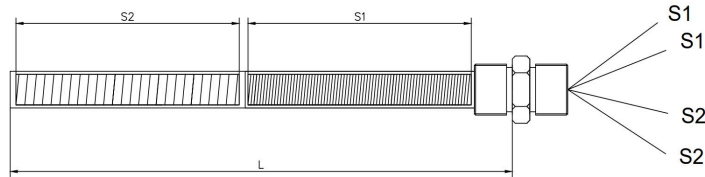

Cartridge heater model XLD2I-N, with 2 equal-sized independent differentiated sectors, equipped with nipple. Body can be made with different types of steel, depending on the application. 2 + 2 cables exiting from a single side, which may have the same color coding with numerical zone identification, or different colors between zones. All heaters are equipped with an additional silicone sheath approximately 80 mm long to protect the cable exit from the heater. Sealing defined according to the application and the heater characteristics.

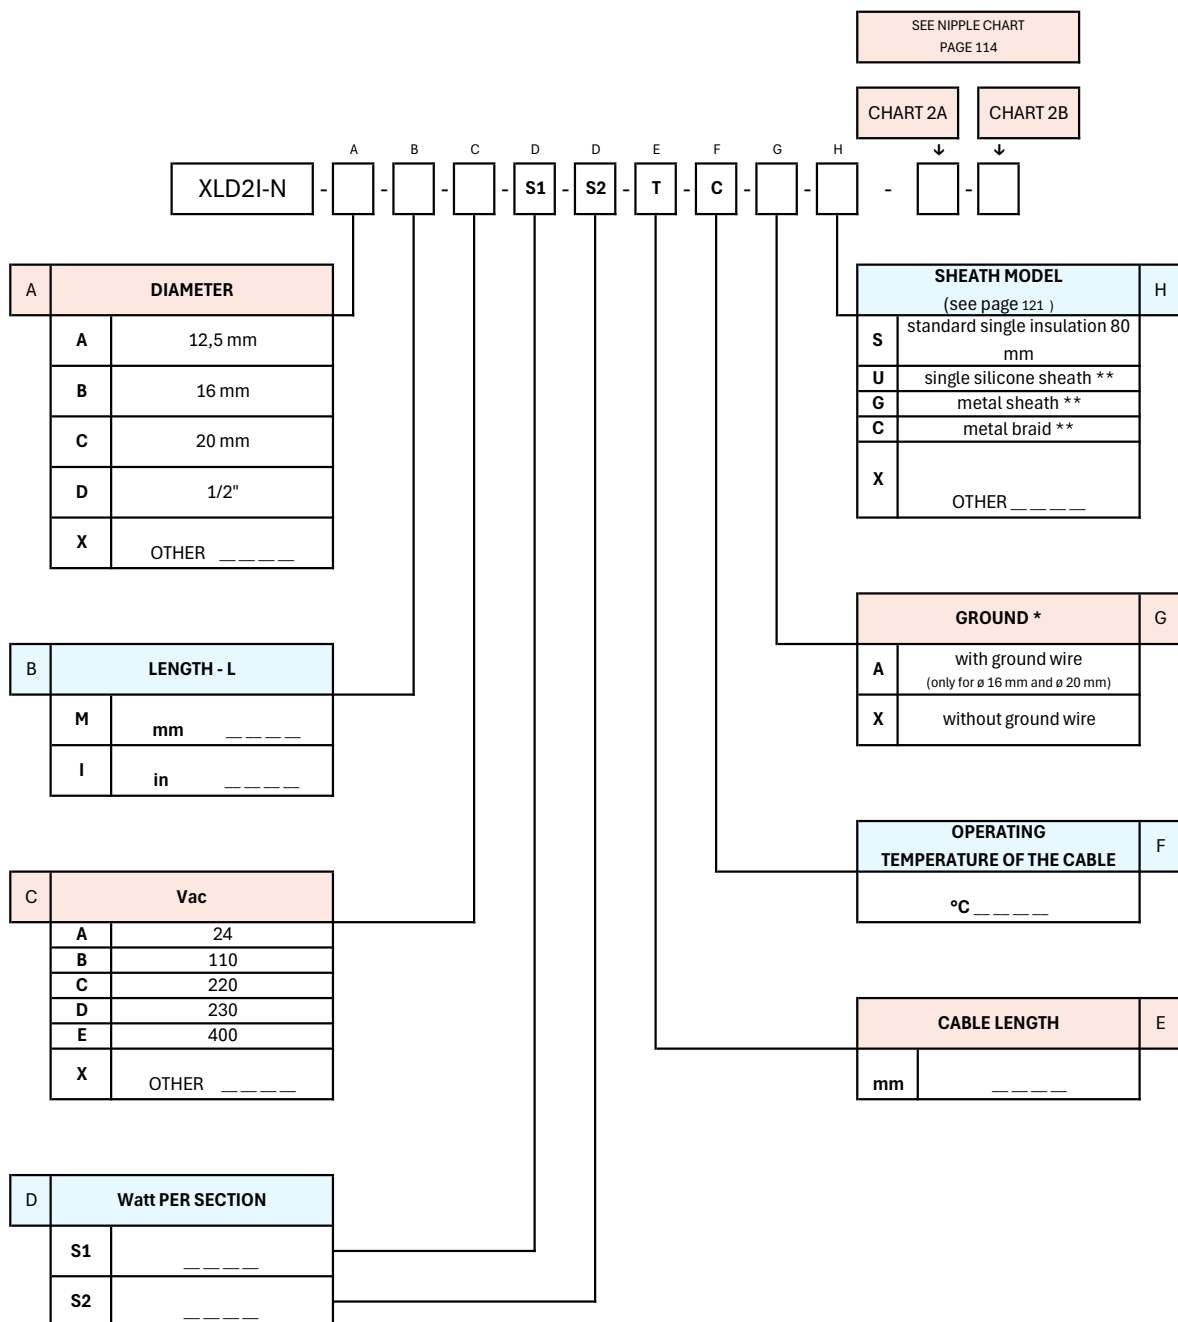

\* Of the same length as the cables

\*\* The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.