





**CARTRIDGE HEATER WITH
2 EQUAL DIFFERENTIATED INDEPENDENT SECTIONS
WITH CONDUIT
XLD2I-P**

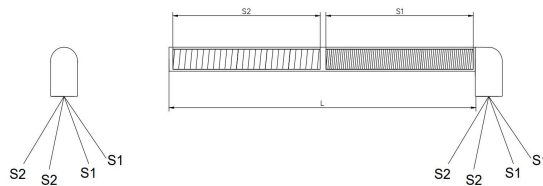

Cartridge Heater Model XLD2I-P, with 2 equal-size sections, differentiated and independently controlled, equipped with a 90° cable outlet and conduit. The body can be manufactured from various types of steel, depending on the application. 2 + 2 cables exit from the same side; they may have identical coloring with numerical zone marking, or different colors for each zone. All heaters are equipped with an additional silicone sleeve, approximately 80 mm in length, to protect the cable outlet area. Sealing is defined based on the application and the specific characteristics of the heater.

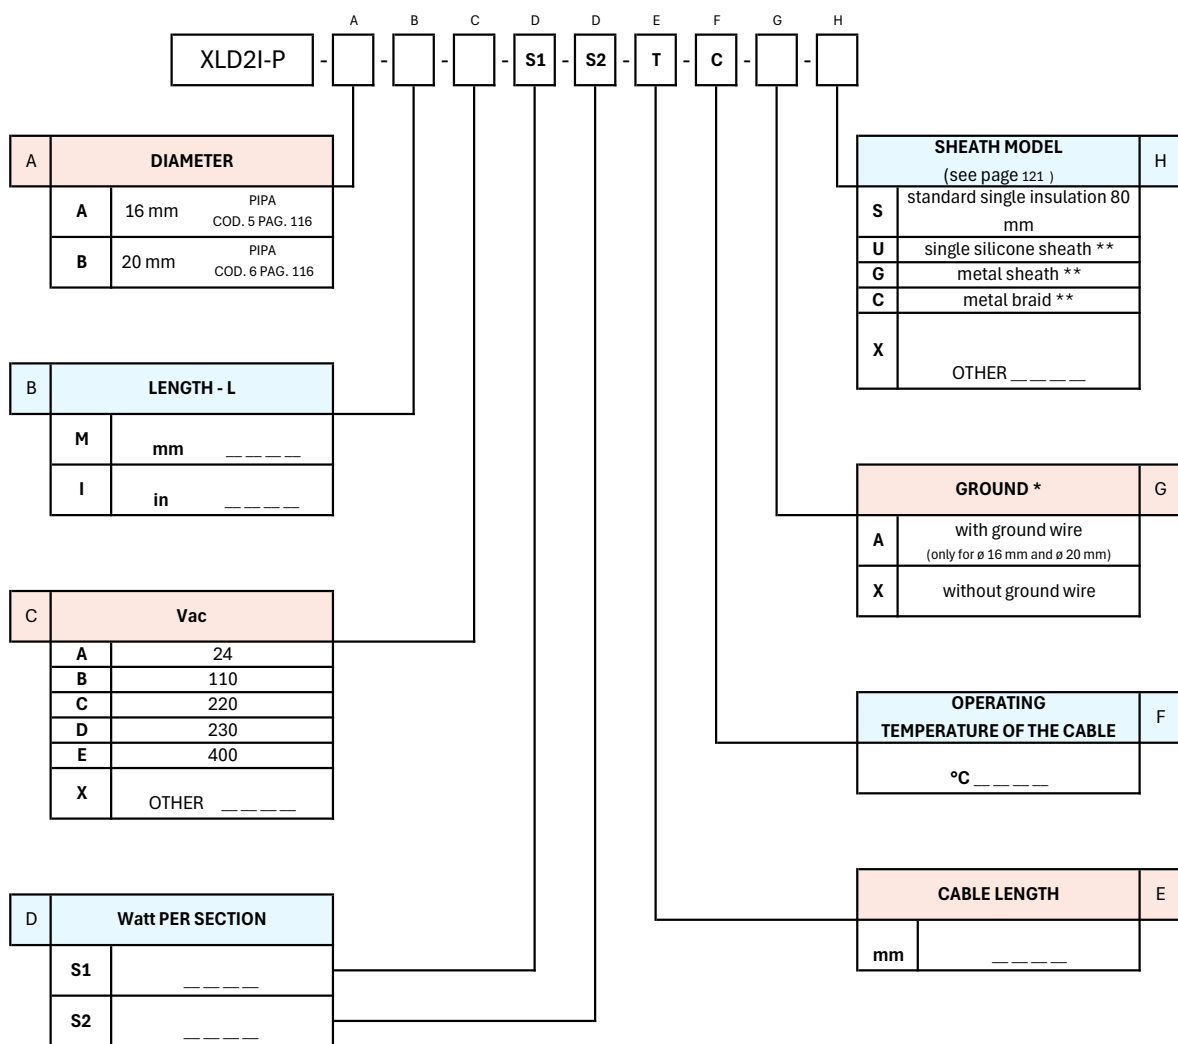

* Of the same length as the cables

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.