




CARTRIDGE HEATER WITH
2 EQUAL DIFFERENTIATED INDEPENDENT SECTIONS
WITH PERPENDICULAR CABLE EXIT

XLD2I-S

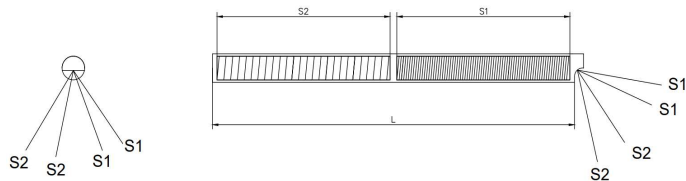

Cartridge Heater Model XLD2I-S, with 2 equal-size sections, independently controlled and differentiated, equipped with a 90° cable exit. The body can be manufactured from various types of steel, depending on the application. 2 + 2 cables exit from the same side; they may have identical coloring with numerical zone marking, or different colors for each zone. All heaters are equipped with an additional silicone sleeve, approximately 80 mm in length, to protect the cable exit area. Sealing is defined according to the application and specific characteristics of the heater.

XLD2I-S	-	A	-	B	-	C	-	S1	-	S2	-	T	-	C	-	G	-	H
----------------	---	---	---	---	---	---	---	----	---	----	---	---	---	---	---	---	---	---

A	DIAMETER		H
A	12,5 mm		
B	16 mm		
C	20 mm		
D	1/2"		
X	OTHER _____		

B	LENGTH - L		
M	mm _____		
I	in _____		

C	Vac		
A	24		
B	110		
C	220		
D	230		
E	400		
X	OTHER _____		

D	Watt PER SECTION		
S1	_____		
S2	_____		

	SHEATH MODEL (see page 121)		H
S	standard single insulation 80 mm		
U	single silicone sheath **		
G	metal sheath **		
C	metal braid **		
X	OTHER _____		

	GROUND *		G
A	with ground wire (only for ø 16 mm and ø 20 mm)		
X	without ground wire		

	OPERATING TEMPERATURE OF THE CABLE		F
	°C _____		

	CABLE LENGTH		E
	mm _____		

* Of the same length as the cables

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.