





CARTRIDGE HEATER WITH
2 EQUAL DIFFERENTIATED INDEPENDENT SECTIONS
AND STRAIGHT THREAD MECHANICAL CONNECTION

XLD2I-T

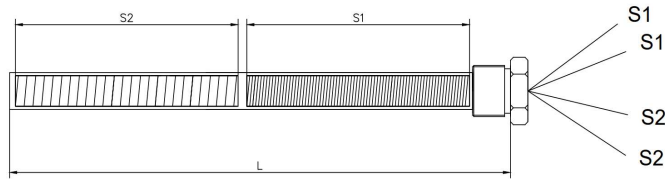

Cartridge heater model XLD2I-T, with 2 equal-sized, differentiated independent sections, equipped with welded connection with straight thread (bottom side). Body can be manufactured with various types of steel, depending on the application. 2 + 2 cables exiting from a single side, which may have the same color with numerical marking of the zones, or different colors for each zone. All heaters are equipped with an additional silicone sheath approximately 80 mm long to protect the cable outlet from the heater. Sealing is defined according to the application and the characteristics of the heater.

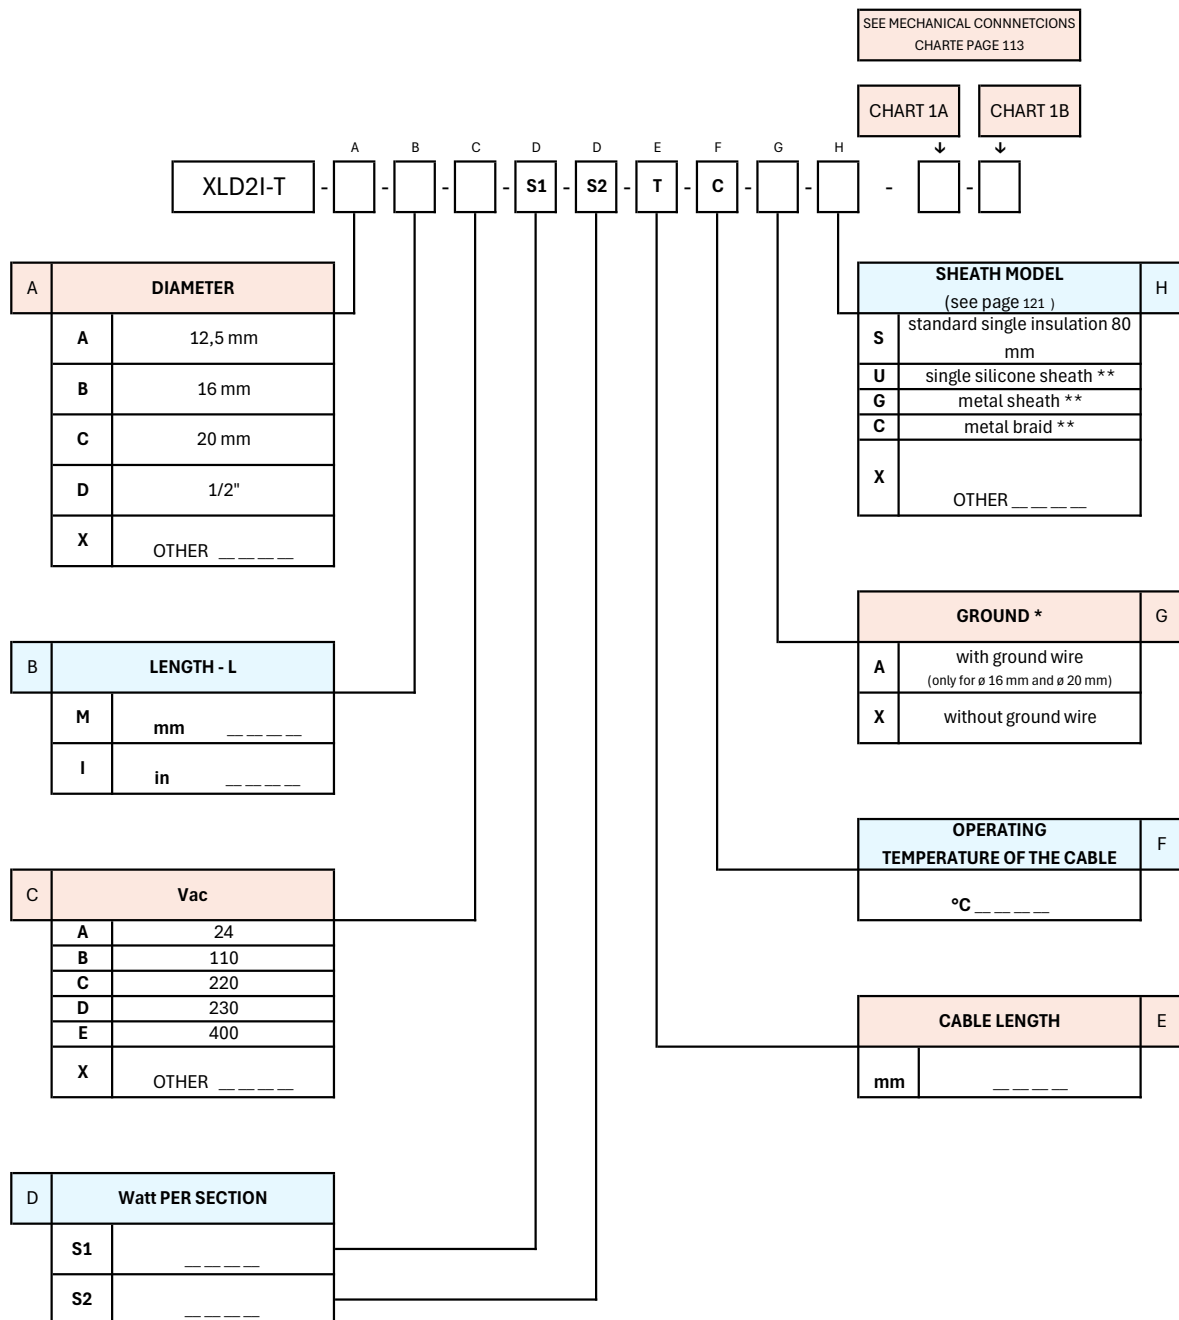

* Of the same length as the cables

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.