





CARTRIDGE HEATER WITH
3 EQUAL DEPENDENT DIFFERENTIATED SECTIONS

XLD3D-A

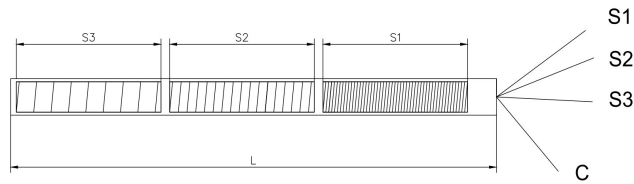

Cartridge Heater Model XLD3D-A, with 3 equal dependent differentiated sections. The body can be manufactured from various types of steel, depending on the application. Three-phase plus common cable exit from the same side. The cables have 2 different colors to distinguish phases from common. The phases are also numbered to identify the corresponding section. The common cable cross-section is sized according to the total power of the heater. All heaters are equipped with an additional silicone sleeve, approximately 80 mm long, to protect the cable exit area. Sealing is defined according to the application and the specific characteristics of the heater.

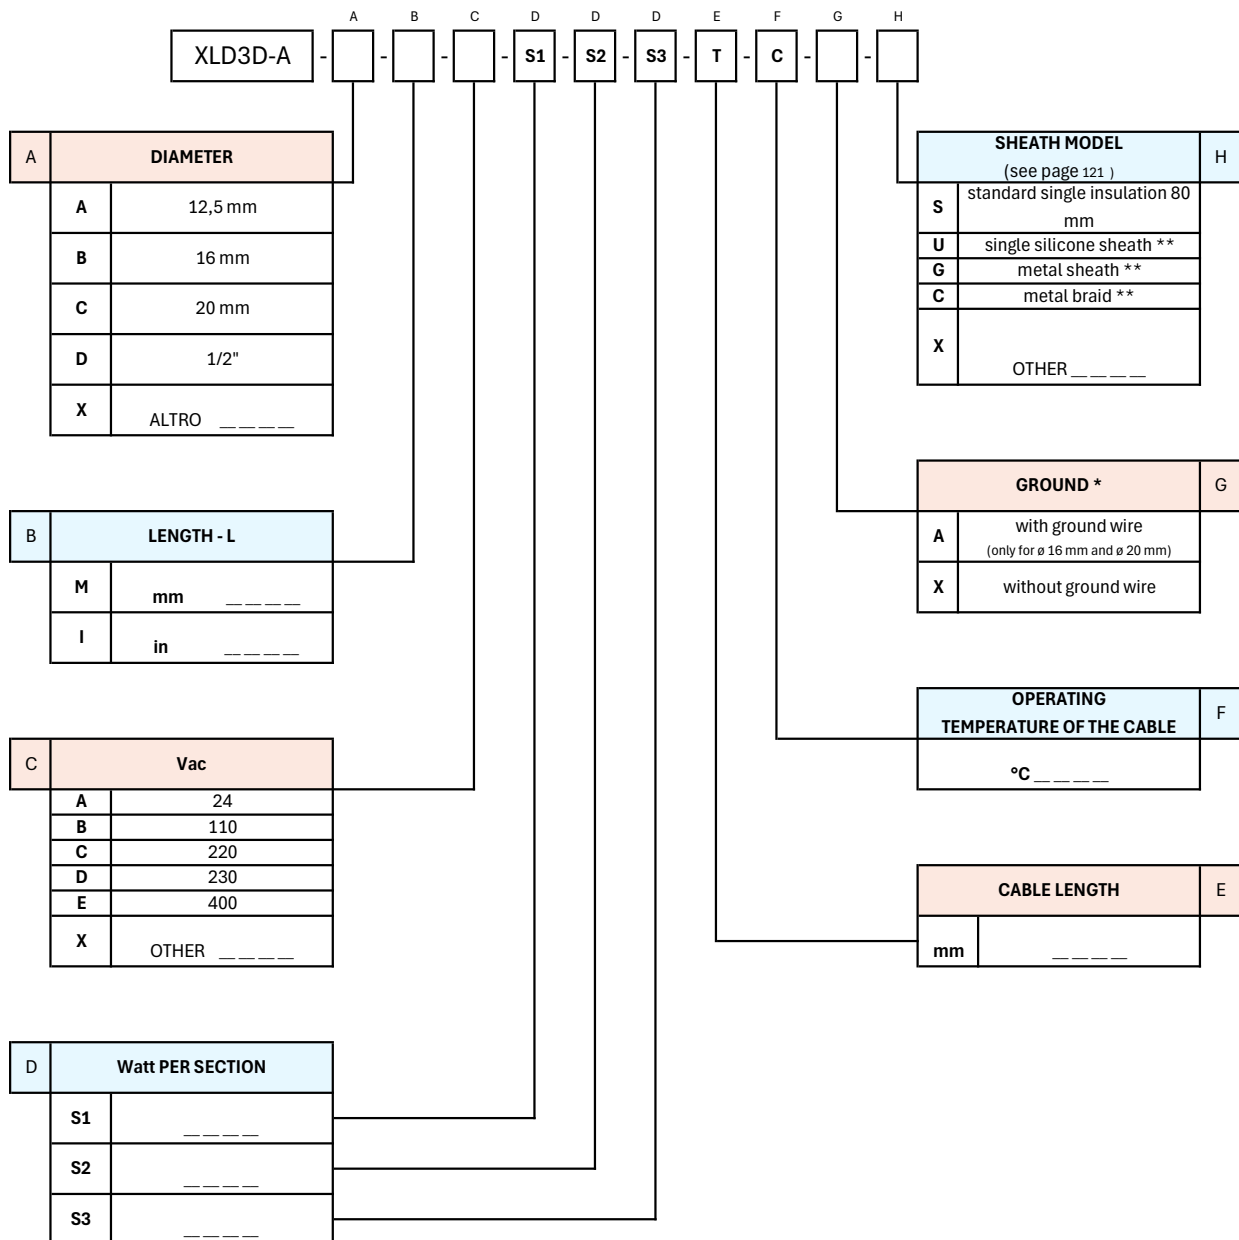

* Of the same length as the cables

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.