




STANDARD CARTRIDGE HEATER
WITH PERPENDICULAR CABLE EXIT

XLN-S

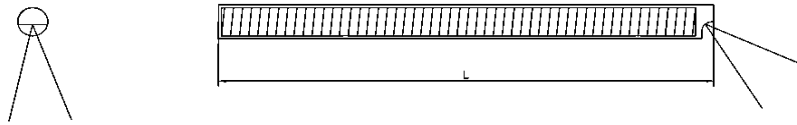

XLN-S Cartridge Heater, with 90° cable outlet through perpendicular cable exit hole. The heater body can be manufactured using different types of steel, depending on the application. Two power supply cables exit from one single end. All heaters are equipped with an additional silicone sleeve, approximately 80 mm in length, with a diameter suited to the power cables, providing protection at the cable exit point. Sealing is defined according to the application and the specific characteristics of the heater.

XLN-S	A	B	C	D	E	F	G	H	I	L	
								</			