Vietata la riproduzione - Disegni e contenuti di proprietà esclusiva mit.D. Srl

CARTRIDGE HEATER WITH
2 EQUAL INDEPENDENT HEATING SECTIONS

XLS2I-A

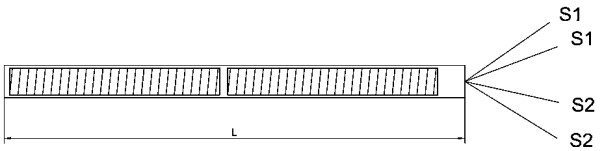

Cartridge heater model XLS2I-A, **with two equal and independent heating sections**. The body can be manufactured in different types of steel, depending on the application. It features two pairs of power supply cables (2 + 2) exiting from one side; the cables may be either of the same color with numerical markings to identify each zone, or of different colors for each section. All heaters are equipped with an additional silicone sleeve, approximately 80 mm in length and with a diameter suitable for the power cables, providing protection at the cable exit point. Sealing is defined according to the application and specific characteristics of the heater.

XLS2I-A - A - B - C - D - E - F - G - H

A	DIAMETER
A	12,5 mm
B	16 mm
C	20 mm
D	1/2"
X	OTHER _ _ _ _

B	LENGTH - L
M	mm _ _ _ _
I	in _ _ _ _

C	Vac
A	24
B	110
C	220
D	230
E	400
X	OTHER _ _ _ _

D	HEATER Watt
	watt _ _ _ _

SHEATH MODEL (see page 121)	H
S	standard single insulation 80 mm
U	single silicone sheath **
G	metal sheath **
C	metal braid **
X	OTHER _ _ _ _

GROUND *	G
A	with ground wire (only for ø 16 mm and ø 20 mm)
X	without ground wire

OPERATING TEMPERATURE OF THE CABLE	F
°C _ _ _ _	

CABLE LENGTH	E
mm _ _ _ _	

* Of the same length as the cables.

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by mit.D. based on the characteristics of the heater.