




CARTRIDGE HEATER
WITH 2 EQUAL AND INDEPENDENT SECTIONS
WITH FLANGE
XLS2I-F

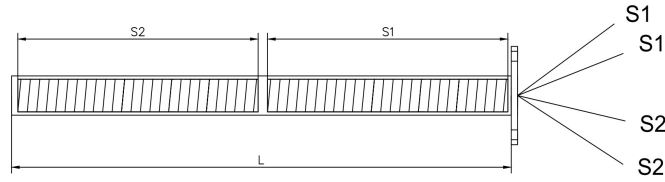

Cartridge heater model XLS2I-F, with **two equal and independent heating zones**, equipped with a fixing flange. The body can be manufactured using different types of stainless steel, according to the application. Two + two wires exit from a single side and may have the same color, with numeric identification of the zones, or different colors for each zone. All heaters are equipped with an additional silicone sleeve, approximately 80 mm in length, with a diameter suitable for the power cable, to protect the cable outlet from the heater. Sealing is defined according to the application and the characteristics of the heater.

SEE FLANGES CHARTS
PAGE 117

CHART 5A CHART 5B

XLS2I-F - [A] - [B] - [C] - w - T - C - [E] - [F] - [G] - [H] - [] - []

A	DIAMETER		
A	12,5 mm		
B	16 mm		
C	20 mm		
D	1/2"		
X	OTHER _____		

			H
SHEATH MODEL (see page 121)			
S	standard single insulation 80 mm		
U	single silicone sheath **		
G	metal sheath **		
C	metal braid **		
X	OTHER _____		

			G
GROUND *			
A	with ground wire (only for ø 16 mm and ø 20 mm)		
X	without ground wire		

			F
OPERATING TEMPERATURE OF THE CABLE			
	°C _____		

			E
CABLE LENGTH			
	mm _____		

B	LENGTH - L		
M	mm _____		
I	in _____		

C	Vac		
A	24		
B	110		
C	220		
D	230		
E	400		
X	OTHER _____		

D	HEATER Watt		
	watt _____		

* Of the same length as the cables

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.