





CARTRIDGE HEATER WITH
2 EQUAL INDEPENDENT HEATING SECTIONS
AND REVERSE -THREADED MECHANICAL CONNECTION

XLS2I-R

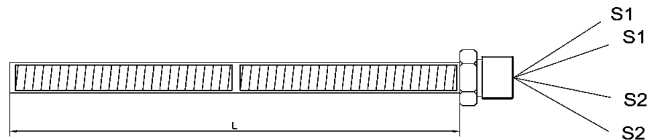

Cartridge heater model XLS2I-R, with 2 equal and independent sections, equipped with welded connection with reverse thread (cable side). The body can be manufactured in different types of steel, depending on the application. Two pairs of power supply cables (2 + 2) exiting from one side only, which can be of the same color with numerical marking of the zones, or of different colors for each zone. All heaters are equipped with an additional silicone sheath, approximately 80 mm in length, with a diameter suitable for the power cable, providing protection at the cable exit point. Sealing is defined according to the application and specific characteristics of the heater.

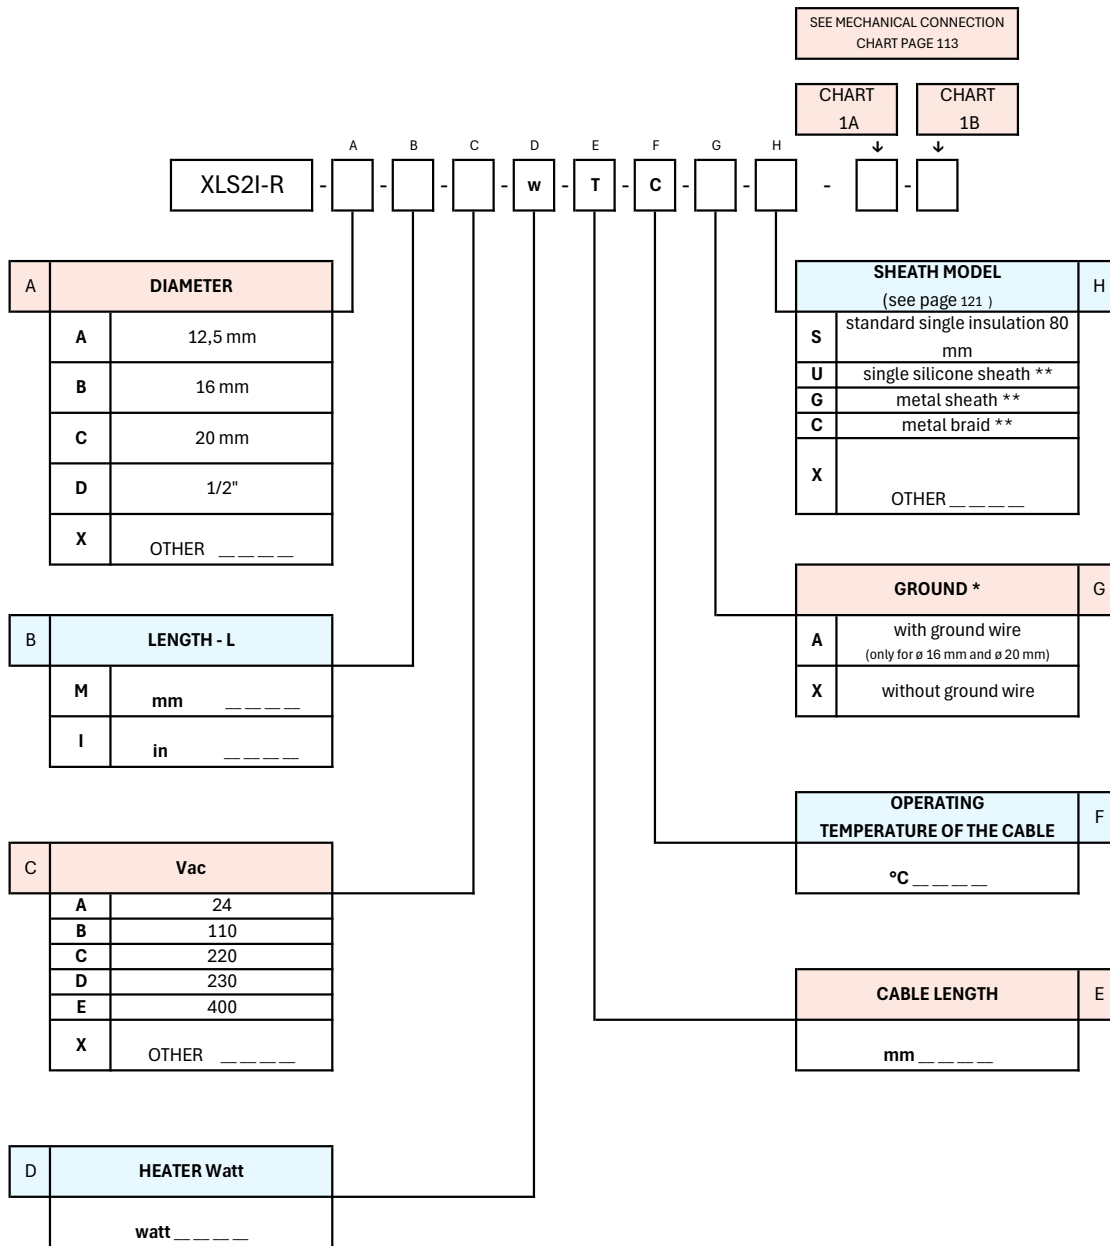

* Of the same length as the cables.

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by mit.D. based on the characteristics of the heater.