




CARTRIDGE HEATER WITH
2 EQUAL AND INDEPENDENT HEATING SECTIONS
WITH STRAIGHT-THREAD MECHANICAL CONNECTION

XLS2I-T

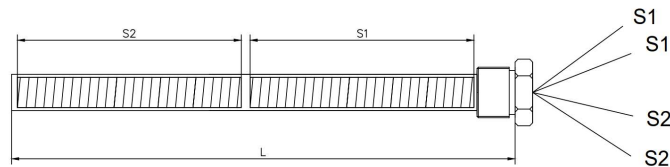

Cartridge Heater model XLS2I-T with two equal and independent heating zones, equipped with a welded connection featuring a straight thread (on the bottom side). The body can be manufactured using different types of stainless steel, depending on the application. Two + two wires exit from a single side and may have either the same color (with numeric identification for each zone) or different colors for each zone. All heaters are equipped with an additional silicone sleeve, approximately 80 mm in length and with a diameter suitable for the power cable, to protect the cable outlet from the heater. Sealing is defined according to the application and the specific characteristics of the heater.

SEE MECHANICAL CONNECTION
CHART PAGE 113

CHART 1A CHART 1B

XLS2I-T - [A] - [B] - [C] - w - T - C - [G] - [H] - [] - []

A	DIAMETER		
A	12,5 mm		
B	16 mm		
C	20 mm		
D	1/2"		
X	OTHER _____		

B	LENGTH - L		
M	mm _____		
I	in _____		

C	Vac		
A	24		
B	110		
C	220		
D	230		
E	400		
X	OTHER _____		

D	HEATER Watt		
	watt _____		

		H	
	SHEATH MODEL (see page 121)		
S	standard single insulation 80 mm		
U	single silicone sheath **		
G	metal sheath **		
C	metal braid **		
X	OTHER _____		

		G	
	GROUND *		
A	with ground wire (only for ø 16 mm and ø 20 mm)		
X	without ground wire		

		F	
	OPERATING TEMPERATURE OF THE CABLE		
	°C _____		

		E	
	CABLE LENGTH		
	mm _____		

* Of the same length as the cables

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.