Vietata la riproduzione - Disegni e contenuti di proprietà esclusiva Mit.D. Srl

CARTRIDGE HEATER WITH 3 EQUAL AND DEPENDENT SECTIONS AND NIPPLE

XLS3D-N

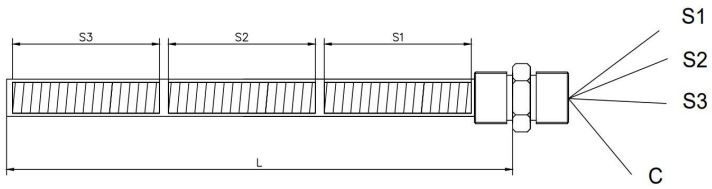

Cartridge heater model XLS3D-N, **with 3 equal dependent sections, equipped with nipple.** The body can be manufactured using different types of steel, depending on the application. Three phases plus common are typically routed from a single side. The cables have two different colors to distinguish the phases from the common. The phases are also numbered to identify the corresponding section. All heaters are equipped with an additional silicone sheath approximately 80 mm in length, with a diameter suitable for the power cable, to protect the cable exit from the heater. Sealing is defined based on the application and the characteristics of the heater.

SEE NIPPLE CHART PAG. 114

CHART 2A | CHART 2B

XLS3D-N - [A] - [B] - [C] - [D] w - [E] T - [F] C - [G] - [H] - [ ] - [ ]

A	DIAMETER
A	12,5 mm
B	16 mm
C	20 mm
D	1/2"
X	OTHER _ _ _ _

B	LENGTH - L
M	mm _ _ _ _
I	in _ _ _ _

C	Vac
A	24
B	110
C	220
D	230
E	400
X	OTHER _ _ _ _

D	HEATER Watt
	watt _ _ _ _

H	SHEATH MODEL (see page 121)
S	standard single insulation 80 mm
U	single silicone sheath **
G	metal sheath **
C	metal braid **
X	OTHER _ _ _ _

G	GROUND *
A	with ground wire (only for ø 16 mm and ø 20 mm)
X	without ground wire

F	OPERATING TEMPERATURE OF THE CABLE
	°C _ _ _ _

E	CABLE LENGTH
	mm _ _ _ _

* Of the same length as the cables

** The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.