





**CARTRIDGE HEATER  
WITH 3 DIFFERENTIATED ZONES  
AND TERMINAL BLOCK  
XLZ3-B**

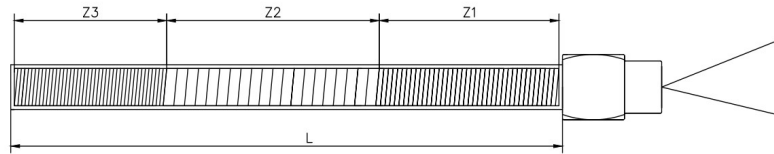

Cartridge heater model XLZ3-B, consisting of a single section with 3 differentiations, equipped with a terminal block with longitudinal cable outlet. Body can be manufactured with different types of steel, depending on the application. Two cables exiting from the same side. All heaters are equipped with an additional silicone sleeve approximately 80 mm long, with a diameter suitable for the power cable, to protect the cable exit from the heater. Sealing defined according to the application and the characteristics of the heater.

SEE TERMINAL BLOCK CHART  
PAGE 115

CHART 3A  
↓



DIAMETER - D			
A	6,5 mm	G	1/4 in
B	8 mm	H	3/8 in
C	10 mm		I
D	12,5 mm	L	5/8 in
E	16 mm		
F	20 mm		
X	OTHER _____		

SHEATH MODEL		I
<small>(see page 121)</small>		
S	standard single insulation 80	
U	single silicone sheath ***	
G	metal sheath ***	
C	metal braid ***	
D	single silicone sheath + outer silicone sheath ***	
M	metal sheath + outer metal sheath ***	
Z	metal braid + outer metal braid ***	
X	OTHER _____	

LENGTH- L	
M	mm _____
I	in _____

THERMOCOUPLE *		H
X	without thermocouple	
A	TCJ bottom side	
B	Central TCJ	
C	TC K bottom side	
D	Central TC K	
E	PT100 bottom side **	
F	PT100 centrale **	

Vac	
A	24
B	110
C	220
D	230
E	400
X	OTHER _____

GROUND *		G
A	with ground wire <small>(only for ø 16 mm and ø 20 mm)</small>	
X	without ground wire	

Watt per ZONE LENGTH in mm		
Z1	W _____	mm _____
Z2	W _____	mm _____
Z3	W _____	mm _____

OPERATING TEMPERATURE OF THE CABLE		F
	°C _____	

CABLE LENGTH		E
mm	_____	

\* Of the same length as the cable.  
 \*\* According to the heater's specifications  
 \*\*\* The length of the silicone sleeves is always intended to be 100 mm less than the total cable length. The diameter of the sleeves is defined by the manufacturer based on the characteristics of the heater.