




CARTRIDGE HEATER  
WITH 2 EQUAL AND DEPENDENT SECTIONS  
AND PERPENDICULAR CABLE EXIT

**XLS2D-S**

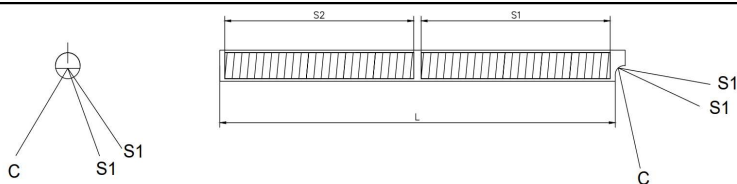

Cartridge heater model XLS2D-S, with 2 equal dependent sections, **with cable outlet through a perpendicular cable exit hole**. The body can be manufactured using different types of steel, depending on the application. Two phases plus common are typically routed from a single side. The cables have two different colors to distinguish the phases from the common. The phases are also numbered to identify the corresponding section. All heaters are equipped with an additional silicone sheath approximately 80 mm in length, with a diameter suitable for the power cable, to protect the cable exit from the heater. Sealing is defined based on the application and the characteristics of the heater.

	XLS2D-S	A	B	C	w	T	C	G	H				
A	<b>DIAMETER</b>	A	12,5 mm	B	16 mm	C	20 mm	D	1/2"	X	OTHER _____		
B	<b>LENGTH - L</b>	M	mm _____	I	in _____								
C	<b>Vac</b>	A	24	B	110	C	220	D	230	E	400	X	OTHER _____
D	<b>HEATER Watt</b>	watt _____											
											SHEATH MODEL (see page 121 )	H	
											S	standard single insulation 80 mm	
											U	single silicone sheath **	
											G	metal sheath **	
											C	metal braid **	
											X	OTHER _____	
											<b>GROUND *</b>	G	
											A	with ground wire (only for ø 16 mm and ø 20 mm)	
											X	without ground wire	
											<b>OPERATING TEMPERATURE OF THE CABLE</b>	F	
											°C _____		
											<b>CABLE LENGTH</b>	E	
											mm _____		

\* Of the same length as the cables

\*\* The sheath length is always considered to be 100 mm shorter than the total cable length. The sheath diameter is defined by the manufacturer based on the resistor's specifications.