





**CARTRIDGE HEATER  
WITH 2 DIFFERENTIATED ZONES  
AND 90° TERMINAL BLOCK  
XLZ2-C**

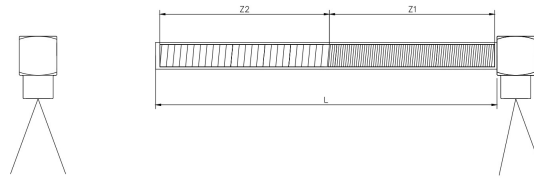

Cartridge Heater Model XLZ2-C, consisting of a single section with 2 differentiated zones and equipped with a terminal block and 90° cable exit. The body can be manufactured from various types of steel, depending on the application. Two cables exit from the same side. All heaters are equipped with an additional silicone sleeve approximately 80 mm long, with a diameter suitable for the power cable, to protect the cable exit area from the heater. Sealing is defined according to the application and the specific characteristics of the heater.

SEE TERMINAL BLOCK CHART  
PAGE 115

CHART 3A  
↓



A DIAMETER - D			
A	6,5 mm	G	1/4 in
B	8 mm	H	3/8 in
C	10 mm		
D	12,5 mm	I	1/2 in
E	16 mm	L	5/8 in
F	20 mm		
X	OTHER _____		

B LENGTH - L	
M	mm _____
I	in _____

C Vac	
A	24
B	110
C	220
D	230
E	400
X	OTHER _____

D Watt per ZONE LENGTH in mm		
Z1	W _____	mm _____
Z2	W _____	mm _____

SHEATH MODEL (see page 121)		I
S	standard single insulation 80	
U	single silicone sheath ***	
G	metal sheath ***	
C	metal braid ***	
D	single silicone sheath + outer silicone sheath ***	
M	metal sheath + outer metal sheath ***	
Z	metal braid + outer metal braid ***	
X	OTHER _____	

THERMOCOUPLE *		H
X	without thermocouple	
A	TCJ bottom side	
B	Central TCJ	
C	TC K bottom side	
D	Central TC K	
F	Central PT100 **	

GROUND *		G
A	with ground wire (only for ø 16 mm and ø 20 mm)	
X	without ground wire	

OPERATING TEMPERATURE OF THE CABLE		F
°C _____		

CABLE LENGTH		E
mm	_____	

\* Of the same length as the cable.  
 \*\* According to the heater's specifications  
 \*\*\* The length of the silicone sleeves is always intended to be 100 mm less than the total cable length. The diameter of the sleeves is defined by the manufacturer based on the characteristics of the heater.